
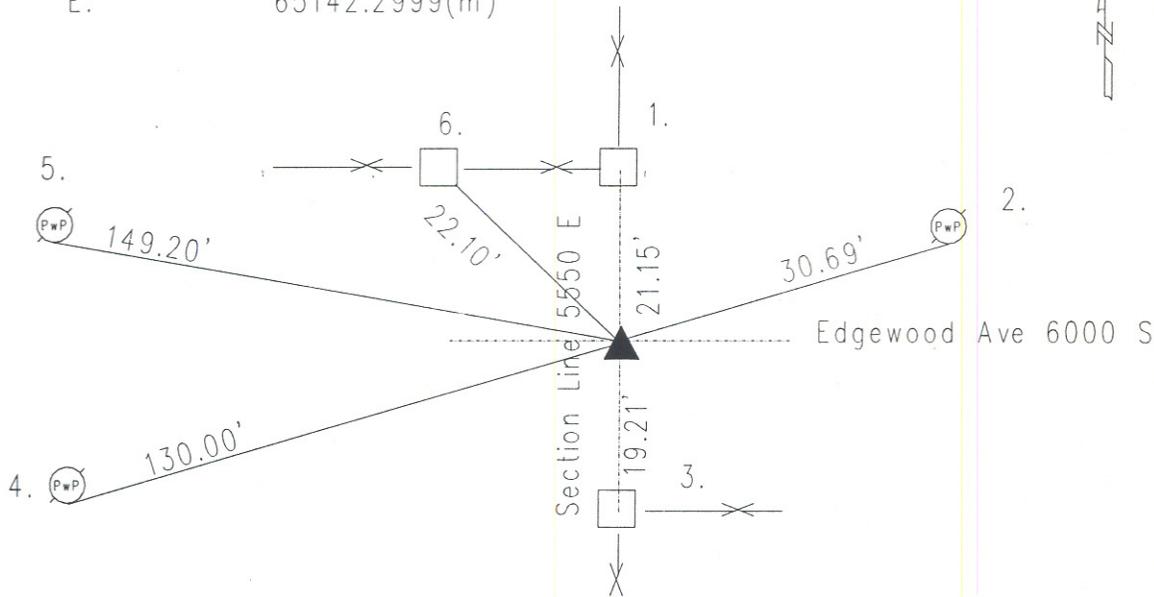


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 10 TOWNSHIP 14 RANGE 4
 DATE: 5-19-02 8-17-07
 PARTY CHIEF: Wilcoxen
 CREW: _____
 TYPE OF MARKER: Harrison FD
 METHOD OF ESTABLISHMENT: County 7-12-97

IN. S.P.C. E ZONE NAD '83
 NAME: 14041002
 N: 492158.4207(m)
 E: 65142.2999(m)

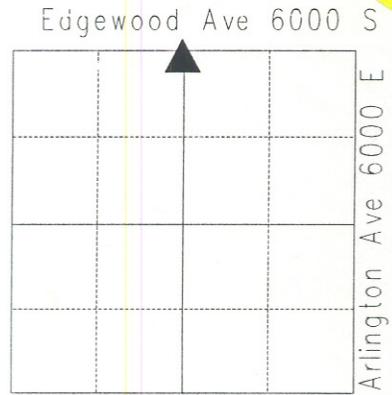

Original post set 1820 by Hendricks with witnesses: 20" beech N 33 E 10 links; 14" sugar maple S 16 links. 6-4-1849 Hosbrook set a rock at the corner witnessed by 12" oak S 5 E 30 links. 10" sugar maple N 34 W 35 links per Franklin Township Legal Survey Book pg. 16. 2-28 thru 3-1-1859 Hosbrook called corner 'A' and set rock. Witness were same in former survey per Franklin Twp....pg. 19. Both, 3-30-1893 & 12-26-1893 per Julian did not specifically call stone;but showed distance to property corner per Franklin Twp....pg. 56. 7-28-64 GWS called pipe over a stone. 4-29-71 McLand called 3" pipe over stone 8" down Dug corner 7-12-84. Stone fd 10" dn. with a 2" steel guard stake. Railroad spike set at surface and re-tied. 4-9-92 Wilcoxen dug and set Harrison. Re-tied 7-12-97 by Kiste. Re-tied 5-19-02 by Wilcoxen. 14041002

REF.	DISTANCE	DESCRIPTION
1.	21.15'	Due N to PK nail w/brass washer SE fence post 10" up
2.	30.69'	Mag nail S PwP#56-735 A 6"up
3.	19.21'	PK nail W corner fence post 12"up
4.	130.00'	Railroad spike S PwP#85-735 B 12"up
5.	149.20'	Mag nail S PwP#60-734 6"up
6.	22.10'	PK nail SE fence post